

SRS
(MX36 / MX37 / MX57)




Meter
(MX34 / MX34R)




Compact SMT type Board-to-Cable

LED Headlight
(MX34 / MX34R / MX44)




Sensor System
(MX19 / MX44)

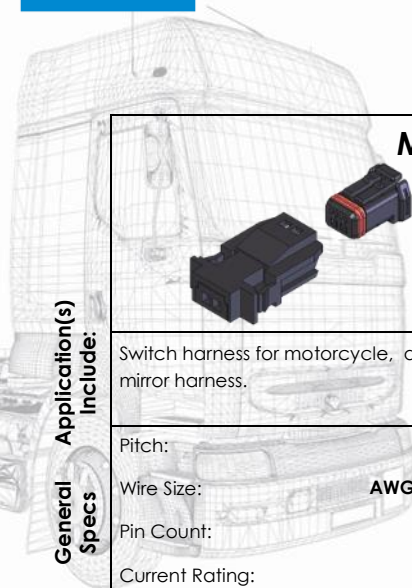


Low Profile Sealed Connector

Engine System
(MX23A / MX47)






High Density Sealed Connector



Application(s)
Include:

General
Specs



Features

				
Switch harness for motorcycle, door mirror harness.	Engine ECU for motorcycle and ATV.	HVAC, Meter Cluster, Heater Control, Audio/Navigation, Power Window, EPS, CAN BUS, TCU, TPMS	Meter cluster, Heater Control	Inline for SRS
Pitch: 2.5mm Wire Size: AWG #22-20 Pin Count: 2, 4 Current Rating: 5A Operating Temp: -40 ~ +85°C	Pitch: 2.5mm Wire Size: AWG #22-16 Pin Count: 12, 18, 26, 34, 36, 40 Current Rating: 3A Operating Temp: -40 ~ +125°C	Pitch: 2.2mm Wire Size: AWG #22-20 Pin Count: 3, 5, 7, 8, 12, 16, 20, 24, 28, 32, 36, 40 Current Rating: 3A Operating Temp: -40 ~ +85°C	Pitch: 2.2mm Wire Size: AWG #22-20 Pin Count: 8, 12, 20 Current Rating: 3A Operating Temp: -40 ~ +85°C	Pitch: 2.5mm Wire Size: AWG #20 Pin Count: 2, 4 Current Rating: 3A Operating Temp: -40 ~ +105°C
Waterproof. Mechanical lock system. Grommet seal. Terminals have low insertion force and stress dispersion. Rear cover protects the grommet from damage	Waterproof. Low profile. Available in reverse mount type. Retainer detects incomplete insertion of socket contact.	Mechanical Lock system enabling complete mating. Secondary lock mechanism to ensure correct terminal retention.	Horizontal mount SMT header. Same features as standard MX34	Waterproof. Spring separates connectors if not correctly mated. Shorting contact eliminates static discharge. Retainer detects incomplete insertion of socket contact.

Application(s)
Include:

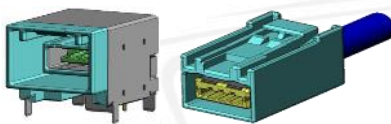
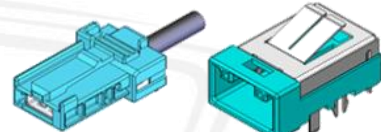
General
Specs

Features

			
Inline SRS	Various types of sensor	Engine ECU for motorcycle and ATV	Inline SRS
Pitch: 2.2mm Wire Size: AWG #20 Pin Count: 4 Current Rating: 3A Operating Temp: -40 ~ +105°C	Pitch: 3.5mm Wire Size: AWG #22-20 Pin Count: 2, 4, 6 Current Rating:	Pitch: 2.5mm Wire Size: AWG #22-16 Pin Count: 39 Current Rating:	Pitch: 2.2mm Wire Size: AWG #22-20 Pin Count: 30, 48, 79 Current Rating:
Mechanical complete mating method. Spring separates connector if not correctly mated. Shorting contact eliminates static discharge. Retainer detects faulty insertion.	Single contact waterproof. Compact size. Improved vibration resistance by vibration absorption function of rubber. Secondary lock mechanism.	Waterproof. Different key option available. Retainer detects incomplete insertion of socket contact.	Mechanical complete mating method. Unmated connection can be detected by terminal. Shorting terminal eliminates static discharge.



ent infotainment infotainme

General Specs	Application(s) Include:		Application(s) Include:		Application(s) Include:		Application(s) Include:	
	MX39		MX39H		MX45		MX48	
								
	Automotive USB 2.0		Automotive USB 2.0		USB 2.0 (Receptacle), Audio		LVDS/GVIF, Navigation System, Video Display	
General Specs	Pitch:	2.2mm	Pitch:	2.2mm	Pitch:	2.2mm	Pitch:	2.0mm
	Wire Size:	AWG #28 Twin Ax	Wire Size:	AWG #28 Twin Ax	Wire Size:	AWG #28 Twin Ax	Wire Size:	AWG #28 (Twin Ax)
	Pin Count:	4	Pin Count:	4	Pin Count:	4	Pin Count:	2
	Current Rating:	500mA	Current Rating:	500mA	Current Rating:	500mA	Current Rating:	-
	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C
Features		USB 2.0 compatible. Sold as a complete harness with USB standard receptacle.	Features		USB 2.0 compatible. Sold as a complete harness with USB standard receptacle.	Features		USB 2.0 compatible. Sold as a complete harness with USB standard receptacle.

General Specs	Application(s) Include:		Application(s) Include:		Application(s) Include:		Application(s) Include:	
	MX49		MX50/53		MX55		MX62	
								
	LVDS, Navigation System, Camera, Audio, TCU		Automotive HDMI, Video Display/ Type A		Digital Camera		Automotive USB 3.0	
General Specs	Pitch:	2.0mm	Pitch:	1.5mm	Pitch:	2.2mm	Pitch:	2.0mm
	Wire Size:	Signal: AWG #26 (Twin Ax) Power: AWG #20	Wire Size:	AWG #28 (Twin Ax)	Wire Size:	AWG #26 (STQ cable)	Wire Size:	Power: AWG #22 Signal: AWG #26 (twin Ax)
	Pin Count:	4	Pin Count:	19	Pin Count:	4	Pin Count:	10
	Current Rating:	Signal: 0.5A	Current Rating:	0.5A	Current Rating:	1A	Current Rating:	2.2A
	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C	Operating Temp:	-40 ~ +85°C
Features		Compatible with USB 2.0 signal speeds. Different key options available. Extremely compact design.	Features		HDMI Type E compatible connector and harnesses. Cable mounted receptacle for mating with consumer HDMI cables is available.	Features		LVDS connector for automotive digital camera. Total transmission characteristics guarantee a performance of connector and harness.