


ATP SDRAM

DRAM Solutions

Intense Performance for Intense Workloads

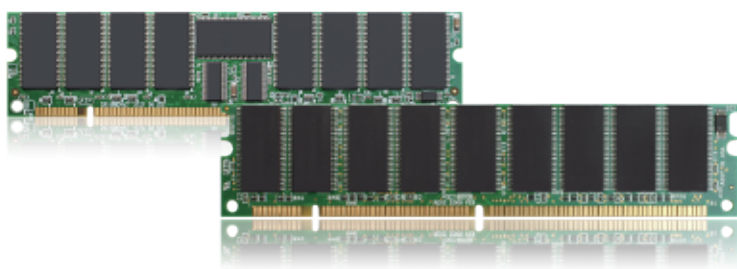

Synchronous Dynamic Random Access Memory (SDRAM) is the common term for PC100 and PC133 single data rate (SDR) SDRAM, with clock frequencies of 100/133 MHz. ATP is committed to providing customers with the highest reliability products and offers custom screening services to help them meet specialized or unique application requirements.

Specifications

SDRAM*	
Category	SO-DIMM
Speed (MT/s)	133 / 100
PCB Height	Low Profile

* Available on a project basis.

SDRAM	
Module Type	SO-DIMM
Function	Unbuffered Non ECC
Frequency	133 MHz
PCB Height	1.0" / 1.25"
Capacity	64 MB / 128 MB / 256 MB / 512 MB
Number of Pins	144
Solutions	Build To Order (BTO)

Key Features

- Legacy system support

Applications

- Networking systems
- Telecommunication
- Gaming
- Healthcare
- Industrial PCs



Industrial Temperature



Conformal Coating



Thicker Gold Finger



Anti-Sulfur Resistors



Test During Burn-In (TDBI)



Complete Drive Test

ATP Global Footprint

To learn more about this product, contact your ATP Representative.

ATP TAIWAN(HQ)

TEL: +886-2-2659-6368
FAX: +886-2-2659-4982
sales-apac@atpinc.com

www.atpinc.com

ATP USA

TEL: +1-408-732-5000
FAX: +1-408-732-5055
sales@atpinc.com

ATP EUROPE

TEL: +49-89-374-9999-0
FAX: +49-89-374-9999-29
sales-europe@atpinc.com

ATP JAPAN

TEL: +81-3-6260-0797
FAX: +81-3-6260-0798
sales-japan@atpinc.com

ATP CHINA

TEL: +86-21-5080-2220
FAX: +86-21-9687-0000-026
sales@cn.atpinc.com