


TV Supercapacitors



Eaton extends industry leading supercapacitor offering with 3 V cylindrical cells

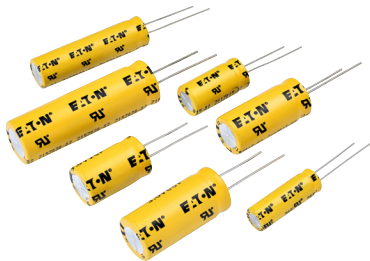

20% increased stored energy and peak power in the same package sizes.

Product description:

Eaton's 3-volt TV supercapacitor cells provides energy storage for backup power, ride through, RF radio transmissions and other pulse power requirements.

The TV products offer a 20% increase in stored energy and peak power density by increasing the operating voltage. Usable energy can increase up to 70%.

This new technology enables higher performance servers, longer operating life or lower cost designs for many industrial electronics.

Features and benefits:

- Industry leading power and ESR in high reliability applications
- Longer lifetime for existing designs with no change in design
- Cost reduction and size reduction for higher voltage designs
- Maintenance free, no replacement needed
- UL recognition






EAT•N

Powering Business Worldwide

Specifications

Capacitance (F)	Part Number	Maximum ESR (Ω) Equivalent Series Resistance	Nominal Leakage (μA)	Stored Energy (mWh)	Peak Power (W)	Pulse Current (A)	Continuous Current (A)	Diameter (mm)	Length (mm)
6	TV1020-3R0605-R	0.035	13	7.5	64	7.4	2.4	10.5	22.3
10	TV1030-3R0106-R	0.026	25	12.5	87	11.9	3.8	10.5	31.5
15	TV1325-3R0156-R	0.024	35	18.8	94	17	3.4	13.5	28.4
25	TV1625-3R0256-R	0.018	60	31.3	125	26	4.2	16.5	28.4
35	TV1245-3R0346-R	0.016	75	42.5	141	34	6.5	12.9	49.0
35	TV1635-3R0356-R	0.015	90	43.8	150	34	5.1	16.5	38.0
60	TV1840-3R0606-R	0.013	135	75.0	173	51	6.7	18.5	42.0
100	TV1860-3R0107-R	0.011	225	125	205	71	11.7	18.5	60.5

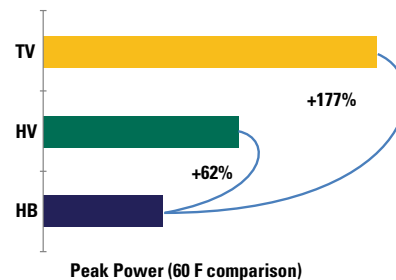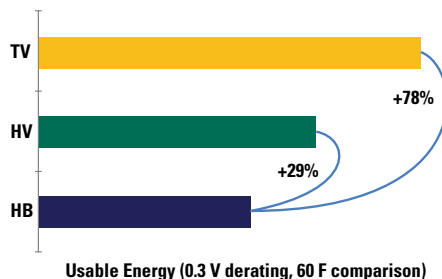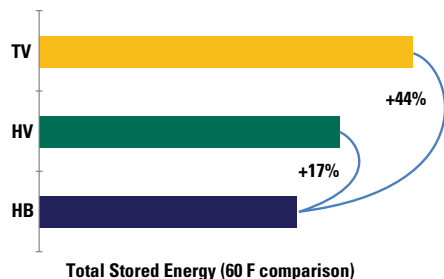

Supercapacitor Small Cell Product Comparison



TV

- 3.0 V
- 6 F to 100 F
- -40 °C to +85 °C



HV

- 2.7 V
- 1 F to 100 F
- -40 °C to +85 °C



HB

- 2.5 V
- 3 F to 110 F
- -25 °C to +85 °C

**Eaton
Electronics Division**
1000 Eaton Boulevard
Cleveland, OH 44122
United States
www.eaton.com/elx

© 2016 Eaton
All Rights Reserved
Printed in USA
Publication No. 10556 BU-MC16106
August 2016



Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

For more information visit:
www.eaton.com/supercapacitors